





PRODUCT IDENTIFICATION

SRNR 3015 I Y D 101 M I 00
a b c d e f g h i

- a: Series name
- b: Product dimensions (a x c)
- c: Shape (T:12-Sided、B:8-Sided、S:4-Sided)
- d: Sealing way (L: Cold seal Y: Heat seal)
- e: Lettering direction ▶
- f: Inductance Value
(1R0:1.0uH; 100: 10uH; 101:100uH)
- g: Inductance Tolerance (K:10% ; M:20% ; N:30%)
- h: Package(T:Tape/Reel、B: Bulk)
- i: Numbering (standard)

SHAPES AND DIMENSIONS

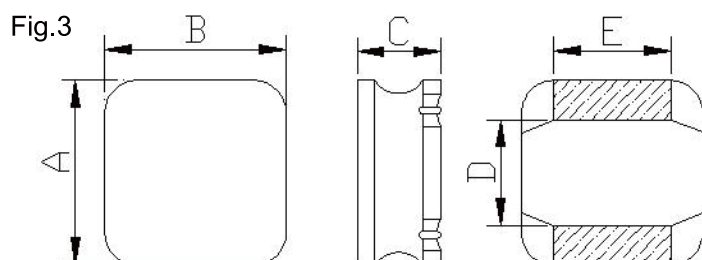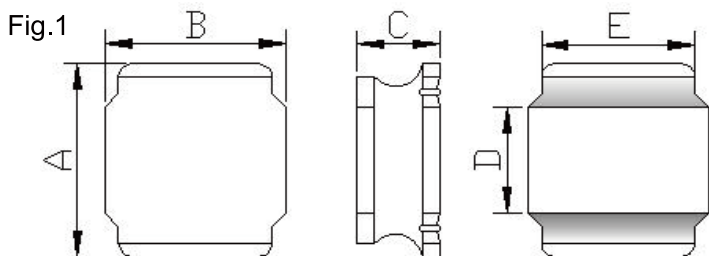




FEATURES

- ◆ low profile, low RDC, high current handling capacities.
- ◆ Magnetically shielded structure that ensures the high-density mounting configurations.
- ◆ Flat bottom surface ensures secure, reliable mounting.

APPLICATIONS

- ◆ Ideally used in Digital camera, notebook, PC, LCD TV set, DC-DC Converters, etc.

▶ Lettering direction

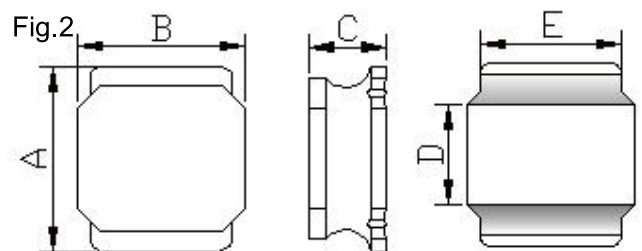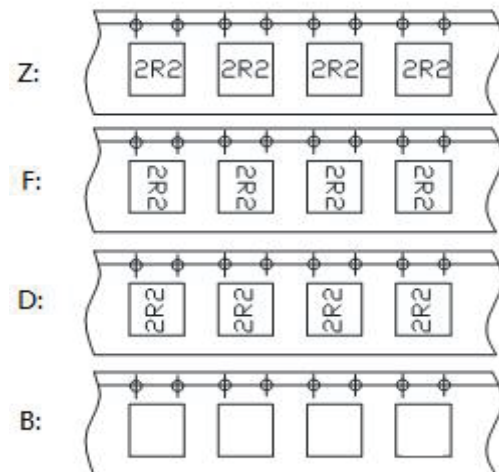

※ All products are printed with Marking except the 201610, 252010, 252012 series.

SHAPES AND DIMENSIONS

Series	Shape	Dimensions(mm)							
		A	B	C Max.	D	E Ref.	F Ref.	G Ref.	H Ref.
SRNS.201610	Fig.1	2.0±0.2	1.6±0.2	1.05	0.8±0.2	1.60	0.70	0.70	1.60
SRNS.252010	Fig.1	2.5±0.2	2.0±0.2	1.05	0.8±0.2	2.00	0.85	0.80	2.00
SRNR.252012	Fig.1	2.5±0.2	2.0±0.2	1.20	0.8±0.2	2.00	0.85	0.80	2.00
SRNR.3010	Fig.2	3.0±0.2	3.0±0.2	1.00	1.5±0.2	2.50	0.80	1.50	2.70
SRNR.3012	Fig.2	3.0±0.2	3.0±0.2	1.20	1.5±0.2	2.50	0.80	1.50	2.70
SRNR.3015	Fig.1	3.0±0.2	3.0±0.2	1.50	1.5±0.2	2.50	0.80	1.50	2.70
SRNR.4010	Fig.2	4.0±0.2	4.0±0.2	1.00	2.1±0.2	3.30	1.10	1.90	3.70
SRNR.4012	Fig.2	4.0±0.2	4.0±0.2	1.20	2.1±0.2	3.30	1.10	1.90	3.70
SRNR.4018	Fig.1	4.0±0.2	4.0±0.2	1.80	2.1±0.2	3.30	1.10	1.90	3.70
SRNR.4020	Fig.1	4.0±0.2	4.0±0.2	2.00	2.1±0.2	3.30	1.10	1.90	3.70
SRNR.4030	Fig.1	4.0±0.2	4.0±0.2	3.00	2.1±0.2	3.30	1.10	1.90	3.70
SRNR.5012	Fig.2	5.0±0.2	5.0±0.2	1.20	2.5±0.2	4.00	1.40	2.30	4.20
SRNR.5020	Fig.1	5.0±0.2	5.0±0.2	2.00	2.5±0.2	4.00	1.40	2.30	4.20
SRNR.5030	Fig.1	5.0±0.2	5.0±0.2	3.00	2.5±0.2	4.00	1.40	2.30	4.20
SRNR.5040	Fig.1	5.0±0.2	5.0±0.2	4.00	2.5±0.2	4.00	1.40	2.30	4.20
SRNR.6020	Fig.1	6.0±0.3	6.0±0.3	2.00	2.9±0.3	4.90	1.70	2.80	5.70
SRNR.6028	Fig.1	6.0±0.3	6.0±0.3	2.80	2.9±0.3	4.90	1.70	2.80	5.70
SRNR.6045	Fig.1	6.0±0.3	6.0±0.3	4.50	2.9±0.3	4.90	1.70	2.80	5.70
SRNR.8040	Fig.1	8.0±0.3	8.0±0.3	4.20	4.0±0.3	6.30	2.20	3.80	7.50
SRNR.8060	Fig.1	8.0±0.3	8.0±0.3	6.00	4.0±0.3	6.30	2.20	3.80	7.50
SRNR.8065	Fig.1	8.0±0.3	8.0±0.3	6.50	4.0±0.3	6.30	2.20	3.80	7.50
SRNR.1050	Fig.3	10±0.3	10±0.3	5.00	6.5±0.3	4.50	2.20	6.20	5.40

SHAPES AND DIMENSIONS

Series	Shape	Dimensions(mm)							
		A	B	C Max.	D	E Ref.	F Ref.	G Ref.	H Ref.
SRNH.201610	Fig.1	2.0±0.2	1.6±0.2	1.05	0.8±0.2	1.60	0.70	0.70	1.60
SRNH.252010	Fig.1	2.5±0.2	2.0±0.2	1.05	0.8±0.2	2.00	0.85	0.80	2.00
SRNH.252012	Fig.1	2.5±0.2	2.0±0.2	1.20	0.8±0.2	2.00	0.85	0.80	2.00
SRNH.3012	Fig.1	3.0±0.2	3.0±0.2	1.20	1.5±0.2	2.50	0.80	1.50	2.70
SRNH.3015	Fig.1	3.0±0.2	3.0±0.2	1.50	1.5±0.2	2.50	0.80	1.50	2.70
SRNH.4012	Fig.2	4.0±0.2	4.0±0.2	1.00	2.1±0.2	3.30	1.10	1.90	3.70
SRNH.4020	Fig.1	4.0±0.2	4.0±0.2	1.20	2.1±0.2	3.30	1.10	1.90	3.70

Part Number	L (uH)	Test Freq. (KHz/V)	DCR Max. (Ω)	Saturation Current(A)	Heat Rating Current (A)
SRNR.4030.TYDR24NT00	0.24	100/1	0.012	8.00	5.10
SRNR.4030.TYDR47NT00	0.47	100/1	0.013	7.50	4.82
SRNR.4030.TYDR68NT00	0.68	100/1	0.013	6.80	4.56
SRNR.4030.TYD1R0NT00	1.0	100/1	0.018	5.26	4.15
SRNR.4030.TYD1R5NT00	1.5	100/1	0.026	4.84	3.34
SRNR.4030.TYD2R2MT00	2.2	100/1	0.039	4.10	2.95
SRNR.4030.TYD3R3MT00	3.3	100/1	0.052	3.30	2.40
SRNR.4030.TYD4R7MT00	4.7	100/1	0.078	2.90	2.00
SRNR.4030.TYD5R6MT00	5.6	100/1	0.085	2.75	1.95
SRNR.4030.TYD6R8MT00	6.8	100/1	0.117	2.60	1.60
SRNR.4030.TYD8R2MT00	8.2	100/1	0.117	2.10	1.60
SRNR.4030.TYD100MT00	10	100/1	0.130	1.95	1.50
SRNR.4030.TYD120MT00	12	100/1	0.175	1.70	1.30
SRNR.4030.TYD150MT00	15	100/1	0.247	1.65	1.11
SRNR.4030.TYD220MT00	22	100/1	0.292	1.30	1.00
SRNR.4030.TYD330MT00	33	100/1	0.429	1.10	0.84
SRNR.4030.TYD470MT00	47	100/1	0.579	0.95	0.72
SRNR.4030.TYD560MT00	56	100/1	0.722	0.85	0.65
SRNR.4030.TYD680MT00	68	100/1	1.128	0.72	0.52
SRNR.4030.TYD820MT00	82	100/1	1.378	0.66	0.47
SRNR.4030.TYD101MT00	100	100/1	1.495	0.60	0.45
SRNR.4030.TYD151MT00	150	100/1	2.340	0.50	0.30
SRNR.4030.TYD181MT00	180	100/1	3.400	0.45	0.26
SRNR.4030.TYD221MT00	220	100/1	3.250	0.40	0.35
SRNR.4030.TYD331MT00	330	100/1	5.200	0.30	0.25
SRNR.4030.TYD471MT00	470	100/1	9.360	0.30	0.20
SRNR.4030.TYD561MT00	560	100/1	9.027	0.28	0.15
SRNR.4030.TYD102MT00	1000	100/1	14.95	0.18	0.09
SRNR.4030.TYD222MT00	2200	100/1	27.00	0.13	0.05

Note:

Tolerance: N:±30% , M:±20% , K:±10%

Saturation Current: DC current at which the inductance drops approximate 30% from its value without current;

Heat Rating Current : DC current that causes the temperature rise ($\Delta T = 40^{\circ}\text{C}$) from 25°C ambient;