




P/N \ SIZE	A	B	C	D	E	F	G	H	THICKNESS
PQ20*16	21.70 ^{+0.50} _{-0.00}	1.60±0.20	3.00±0.20		1.50±0.10	17.50±0.25	29.00±0.50	7.90±0.05	0.30T
PQ20*20-1	21.70 ^{+0.50} _{-0.00}	1.60±0.20	3.00±0.20	R1.00	1.20 ^{+0.10} _{-0.20}	21.20±0.20	30.20±0.50	7.60±0.05	0.30T
PQ20*20-3	21.70 ^{+0.50} _{-0.00}	1.20±0.20	3.00±0.20	R1.00	1.50±0.20	20.50±0.25	27.50±0.50	7.90±0.20	0.30T
PQ26*20	27.70 ^{+0.50} _{-0.00}	1.70±0.20	3.00±0.20	R1.00	1.50±0.10	21.50±0.25	33.00±0.50	10.50±0.05	0.30T
PQ26*20-1	27.70 ^{+0.50} _{-0.00}	1.70±0.20	3.00±0.20	R1.00	1.50±0.10	21.00±0.25	32.50±0.50	10.50±0.05	0.30T
PQ26*25	27.70 ^{+0.50} _{-0.00}	1.70±0.20	3.00±0.20	R1.00	1.50±0.10	26.10±0.25	37.50±0.50	10.50±0.05	0.40T
PQ32*30	33.60 ^{+0.50} _{-0.10}	2.50±0.20	3.00±0.20	R1.00	1.70±0.10	31.80±0.25	46.50±0.50	12.30±0.10	0.40T
PQ35*35	37.20 ^{+0.50} _{-0.00}	2.70±0.20	3.00±0.10	R1.00	1.70±0.10	36.20±0.25	50.50±0.50	13.00±0.05	0.50T
FLP-PQ26/20	27.70 ^{+0.50} _{-0.00}	1.70±0.20	3.00±0.20	R1.50	1.50±0.10	21.50±0.25	32.50±0.50	10.50±0.10	0.30T
FLP-PQ20/16	27.70 ^{+0.50} _{-0.00}	1.60±0.20	3.00±0.20	R1.50	1.50±0.20	17.00±0.25	28.50±0.50	7.90±0.10	0.30T
FLP-PQ26/25	27.70 ^{+0.50} _{-0.00}	1.70±0.20	3.00±0.20	R1.50	1.50±0.20	25.40±0.25	36.80±0.50	10.50±0.10	0.40T
FLP-PQ35/35	37.20 ^{+0.50} _{-0.00}	2.70±0.20	3.00±0.20	R1.50	1.70±0.20	36.00±0.25	50.50±0.50	13.00±0.10	0.50T

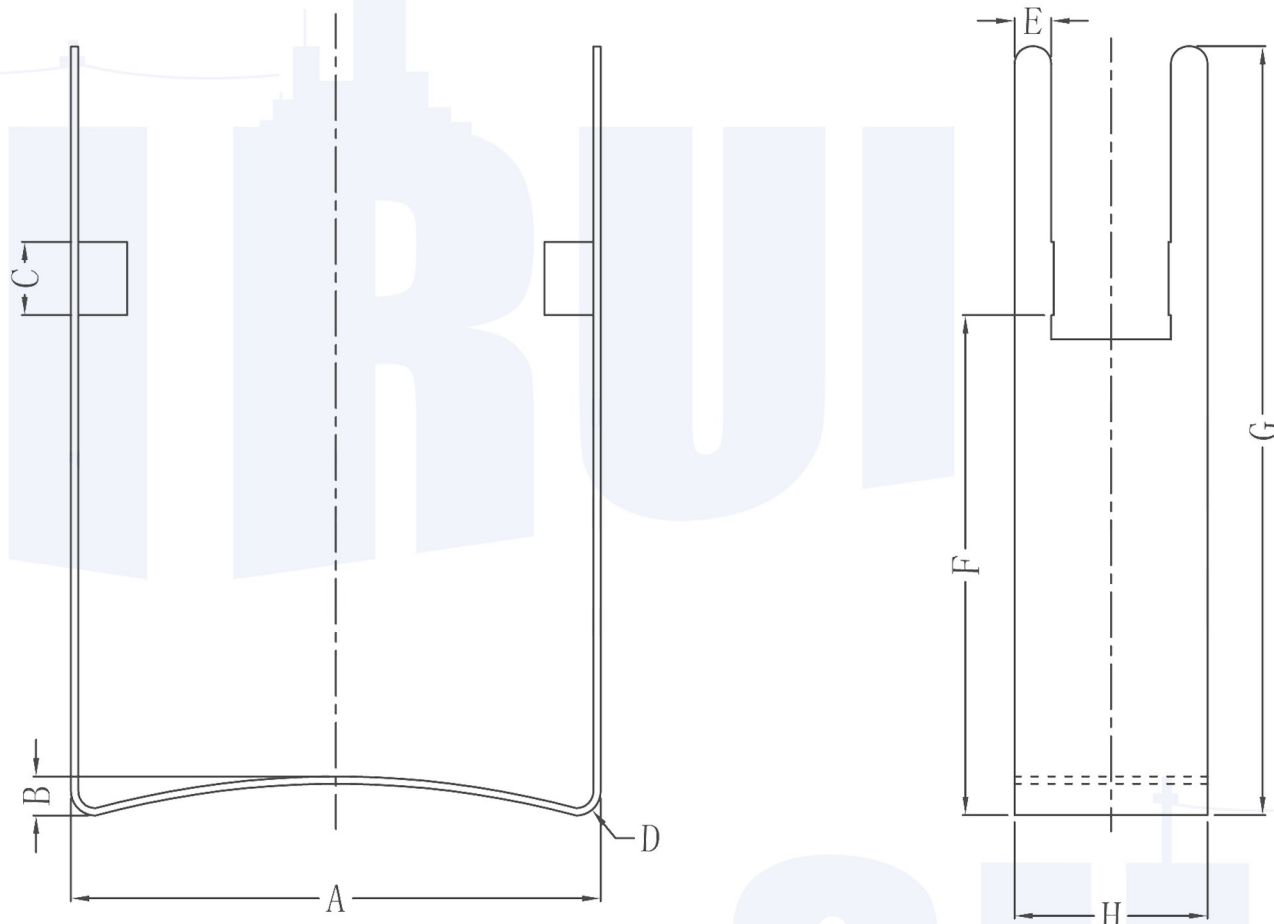

Hefei Shirui Electronic Technology Co.,Ltd

PQ SERIES

MATERIAL:
C5191

ANGLE: ± °
⊕ ▽

UNIT:
MM

SCALE:
2:1

DRN.

WILL H

TOLERANCES: ±0.2

CHD.

IRINA LEE

SURFACE PROCESS:

ISSD.

JAMES HU

CLEAN